

## TD129 SERIES

RoHS




Code	Part No.	Torque N · m	Direction
612901	TD129A1-35K	3.5	CW (R)
612900	TD129A1-40K	4.0	CW (R)

Code	Part No.	Torque N · m	Direction
612911	TD129B1-35K	3.5	CCW (L)
612910	TD129B1-40K	4.0	CCW (L)

※Do not apply some axial & radial forces to gear/shaft.


※Operation temperature : 0°C~40°C (Special designing for use -20°C~60°C is also available)

### DURABILITY

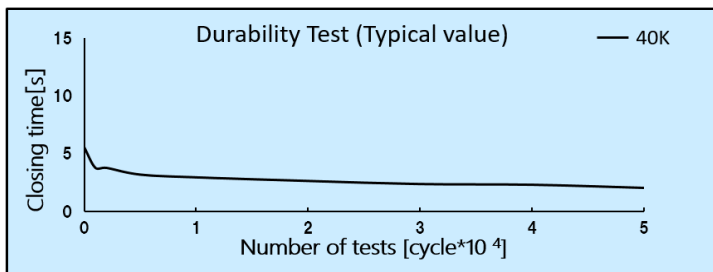


Operation angle	110°	
Durability	50,000 cycle	
Closing time	Applied torque	Initial value
	3.5 N · m	5 ~ 15 (sec)
	4.0 N · m	5 ~ 15 (sec)

### TEMPERATURE CHARACTERISTICS

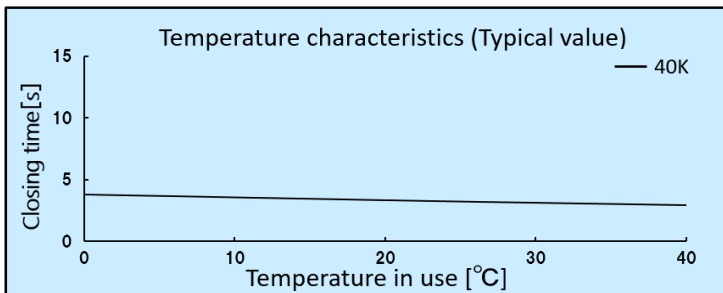

### TEST CONDITION

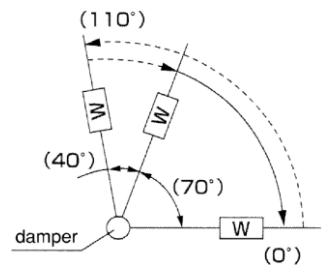

### STANDARD COMPONENTS

Part name	Material
Housing	ZDC
Shaft	ZDC
Cap	PBT

**TOK America, Inc.**

OFFICE, CA, USA TEL:+1-844-486-5872 FAX:+1-949-281-6338  
EMAIL:contact@tok-usa.com

Product specification are subject to change without prior notice.